
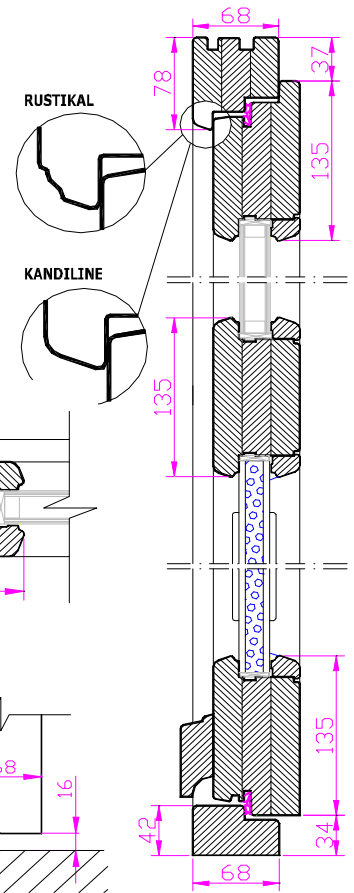



INWARDS OPENING HARDWOOD EXTERNAL DOORS

Profile	IV68 KANDILINE or IV68 RUSTIKAL
Jamb	68 x 78 mm
Threshold	42 mm oak threshold or 22 mm aluminium-profile threshold
Doorleaf	rebated on the sides and on the top, bottom side without rebation
Construction	135 x 68 mm
Panelling	5 options
Gasket	Double cavity seal in middlegroove around the doorleaf's perimeter
Hinges	Roto
Lock	DIN (GU 3-point or KfV 1-point locking)
Finishing	waterbased paints or stains
Glazing	double or triple glazed panel, ($k \geq 1,1 \text{ W/m}^2\text{K}$)



Grilles

- option 1 penetrating bars 50 mm
- option 2 glued on both sides+slats inside the glazing (Norwegian style)
- option 3 taped bars on both sides of the glazingpanel
- option 4 inside the glazingpanel

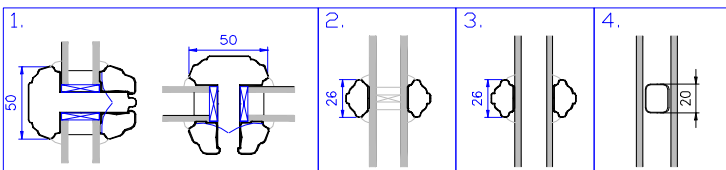

Panelling:

- drawing 1 flush insulated panel
- drawing 2 profiled insulated panel - vertical or diagonal grooves
- drawing 3 raised panel
- drawing 4 profiled sheeting outside, timber panelling inside
- drawing 5 profiled sheeting on both sides (fixed with screws)

1. 2a. 2b. 3. 4.inside

